



# ClientCube 2 Mounting Bracket Quick Start Guide





---

## About the ClientCube 2 Mounting Bracket

---

### Package contents

The list below shows the contents of a mounting bracket package (images are not to scale).

	ClientCube 2 mounting bracket (× 1)
	Keeper bracket (× 1)
	Wood screws, 0.75-inch (× 7) for under-desk mounting
	Machine screw, 0.75-inch (× 1) for rear bracket
—	This <i>Quick Start Guide</i> (× 1)

---

*Continued on next page*



## About the ClientCube 2 Mounting Bracket, Continued

---

### Assembled brackets

The pictures below show assembled brackets (figure 1) and the mounting bracket installed below a desk with a ClientCube 2 (figure 2).

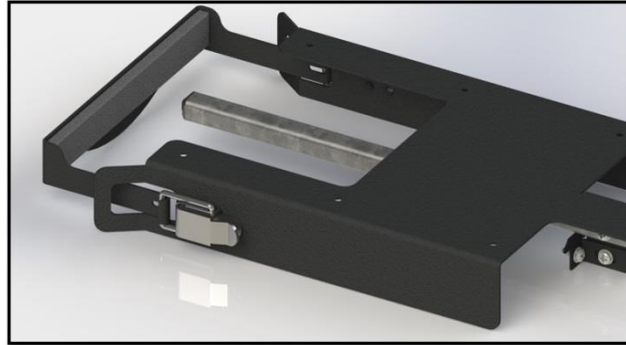


Figure 1. Mounting bracket with keeper bracket latched in place



Figure 2. ClientCube 2 mounted under a desk

---



## Before You Begin

---

### Safety and precautions

#### If any zero clients in a ClientCube 2 contain a smart card reader:



Prevent ESD (electrostatic discharge) damage to smart card readers by always discharging your body and smart card before using a reader (for example, by touching a grounded, unpainted, metal object). ESD can vary depending on many environmental conditions, including clothing that users wear and how they handle smart cards. ESD damage can potentially cause unsupported card reader behavior including failure. Always perform ESD prevention steps before using the card reader.

---

### Tools

The list below shows tools needed for installation.

- Phillips head screwdriver
  - Drill and  $\frac{3}{32}$ -inch bit (for drilling pilot holes)
-

## Installation

This section shows how to install the mounting bracket and then install and secure a ClientCube 2.

### Installing the mounting bracket

The steps below show how to install a mounting bracket under a desk.

Step	Action
1	<p>Place the bracket on the underside of a desk. Ensure the front ears are set back a minimum of 1 1/8- inches from the front of the desk. Mark the holes in the bracket and set it aside.</p> <p><b>NOTE:</b> If you are installing the mounting bracket near a wall, ensure that the bracket ears can fully extend when securing the keeper bracket (see <a href="#">Figure 6 below</a>).</p>
2	<p>Use a 3/32-inch bit to drill pilot holes into the underside of the desk. Be sure that pilot holes do not exceed the length of the included wood screws.</p>
3	<p>Support the mounting bracket and use the included wood screws to screw it into place under the desk.</p> <div data-bbox="613 1024 1453 1522" data-label="Image"> </div> <p data-bbox="719 1564 1356 1596">Figure 3. Screwing the mounting bracket into a desk</p>



Now mount the ClientCube 2 as shown in the next section.

*Continued on next page*

## Installation, Continued

### Mount the ClientCube 2

The steps below show how to mount a ClientCube 2.

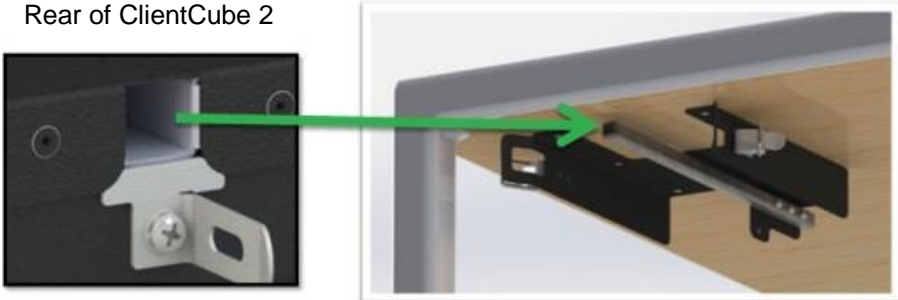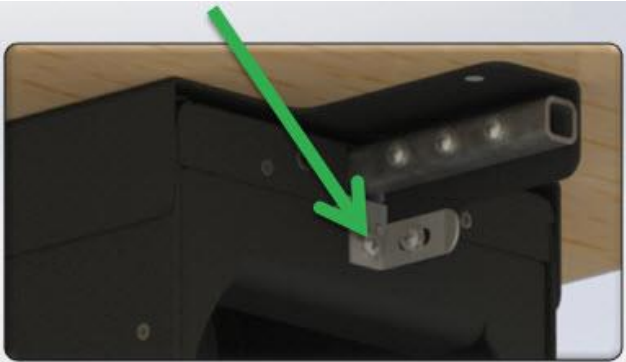



Step	Action
1	<p>The ClientCube 2 slides onto the mounting bracket's square tube. Lift the ClientCube 2 and align the square hole on the back of the ClientCube 2 with the bracket's square tube. Push the ClientCube 2 onto the tube until it stops.</p> <p>Rear of ClientCube 2</p>  <p>Figure 4. Sliding the ClientCube 2 onto the mounting bracket square tube</p>
2	<p>From the rear of the mounting bracket, screw the included machine screw into the ClientCube 2.</p>  <p>Figure 5. Secure the bracket to the ClientCube 2 with the included screw</p>

*Continued on next page*



## Installation, Continued
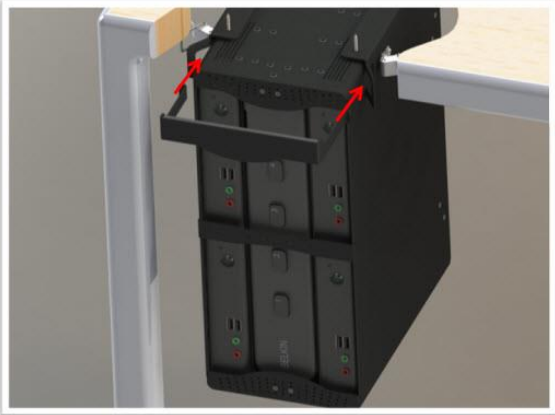
### Mount the ClientCube 2 (continued)

Step	Action
3	Slide the keeper bracket through cutouts on the front and fasten the latches.     Figure 6. Slide the keeper bracket through cutouts and latch

## Additional Information and Support

### Contacting Support

Web	<a href="http://www.clearcube.com/support/">www.clearcube.com/support/</a>
Email	<a href="mailto:support@clearcube.com">support@clearcube.com</a>
Toll-free	(866) 652-3400
Direct	(512) 652-3400