

<GTQ %N&GPV

Kμš•š v]vP v šŒ o]i v s|Œšμ o]i }Œš v P Á]š Z
μ o D}v]š}Œ•U ò h^ U v /vš PŒ š ^u Œš Œ Z Œ

%NGCT%WDGm FGNKXGTU JKIJ RGTHQTOCPEG CPF TQDWUV UGEWTKV KP C PGY \GTQ
DCUGF QP VJG 6GTGCFKEK 2%Q+2m 6'4# RTQEGUUQT 6JG.%NQWF &GUMVQR %&
<GTQ %NKG PVRGTHQTOCTUPEHGWKFGQ QP FWCN OQPKVQTU CPF EQPPGEVQ UQXGT DGT
PGVYQTMU VQ 8/YCTGm XKTWVCN FGUMVQRU-RPT%N&KTYWONG ŒŒJMBU U|UVGOU T
CPF TGOQVG %NGCT%WDG \$NCFG 2%U

+P %NGCT%WDG %GPVTCNK\GF CPF 8KTWVCNK\GF &GUMVQR +PHTCUVTWEVWTGU %8&
5OCTV8&+ CPF \$NCFG 2% TGUQWTEGU DTQMGTGF D[8/YCTG *QTK\QP 6TGFKVKQPCN P
WUGU QPG FGFKECVGF EQORWVGT ECP VCMG CFXCPVCIG QH JCTFYCTG CEEGNCTCV
NGICE[ŒKTUKVKEP NKŒVGF)ŒXG CRRNKECVKQP U

6JG %& hU RQYGTHWN 6'4# - EJ#B UWRKQTV\$ %KRJGTU HQT GZEGRVKQPCN UGEWTK
RQYGT OCPCIGOG PŒP#K VJG900MWTGU

6JG \GTQ ENKGPVhU KPVGITCVGF UOCTV ECTF TGCFGT GPJCPEGU UCHGIWCTFU KP UG
'PCPEG CPF JGCNVJECTG UGVVKPIU #FFKVKQPCNN[VJG KPVGITCVGF UOCTV ECTF T
CPF CRRNKECVKQP CEEGRU5YKVVWRKNTV UKGBR WUGTU HTQO URGPFKPI XCNWCDNG V
NQIHKPI KPVQ EQORWVGTUeUOCTV ECTF TGCFGTU ECP KORTQXG YQTMRNCEG GH'EKGR
UGVVKPIU UWEJ CU JGCNVJECTG

\$GPG'VU

- všŒ o]i • W Œ • - /v Œ • • • μŒ]šŒ }(^)Œ h^ îXì %ŒŒš•WŒŒ)À] • oo šZ -v oš•Œ μ • Œ} o] v
•]vPo U • μŒ o %ZŒ•] o v š • š{)μŒ (Œ)vš l šÁ) Œ(Œš v Œ W Á]šZŒ) (μo-o)u%o] v šX
- o]À Œ• (μoo • l - ^šŒ}vP-]šîñò • u oo Œ •%Œ Œ (μ)Œ H•šŒŒ[• }voŒ Á
šŒ }u%μŒvP Œ%Œ v ŒŒ%ŒŒ}v • u vš• • Z)%Œ %Œ o u v š Á C
}À Œ /W }vv Œ}v { W • v sDÁ Œ ,)C • lš}%Œ
- Kv W v-/í s/]•%Œ Œ }vv š}Œ

(WVWETQQH ;QWT <GTQ %NKG P V &KUP


%& <GTQ %NKG PVRGTHQTOCTUPEHGWKFGQ QP
OQPKVQTU QXGT UVC PFCTF 'VJGTPGV PGVYQ
EQPPGEVQT GPF EQPPGEVQ UQXGT VJG %& UWRP
FKURNC[CV € TGUQNWVKQP &KURNC
FKURNC[U CV € TGUQNWVKQP 7UGTU
TGUQNWVKQP CPF QTKGPVCKQP NCPFUECR
6JKU GZEGNNGPV FGUMVQR RCEMCIG EQOGU
CPF VYQ TGCT 75\$ RQTVU



Zero Client Model CD7524

Simple Installation, Secure Hardware

CD7524 Zero Client requires no special OS drivers. There are no moving parts that can fail and no removable parts that encourage user tampering or theft. The units support all standard peripherals including multiple monitors, keyboard, mouse, audio input/output devices, and more.

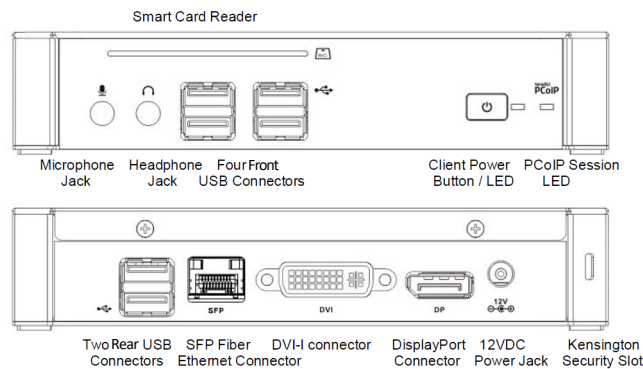

Front and rear I/O connections

CD7524 Zero Client Specifications

Chipset	Teradici TERA2321 PCoIP®
Operating System	None
Display	Single: 2560 × 1600 @60Hz (DisplayPort only) Dual: 1920 × 1200 @60Hz
Memory	512 MB DDR3
I/O Physical	DisplayPort × 1 DVI-I × 1 USB 2.0 × 6 Ethernet connector (SFP) 3.5 mm microphone port × 1 3.5 mm headphone port × 1
Network	LAN: Fiber SPF module, 100/1000 BASE-X
Max Consumption	8 Watts w/o USB; 26 Watts w/ 6 high power USB devices attached
Power Supply	Universal 100-240 VAC, 50-60Hz Output: 12 V DC Optional Power over Ethernet (PoE) splitter
Security	Kensington® Slot for use with Kensington locks Integrated PKI approved smart card reader
Environment	Stationary office installation, 0° to 40° C
Physical Characteristics	Metal
Dimension	6.5 (W) × 1.3 (H) × 5 (D) inches

Ordering Information

Call: (866) 652-3500 Email: sales@clearcube.com to order or for more information.

Model No.	Part Number	Part Description
CD7524	G0900397	Model CD7524 Zero Client, Dual Display, Fiber. 6 USB, CAC