

## Overview

---

### Package Contents

- CD8866 thin client
  - Power adapter and power cable
  - This *Quick Start Guide*
- 

### Thin Client Features

The pictures below show CD8866 thin client features.

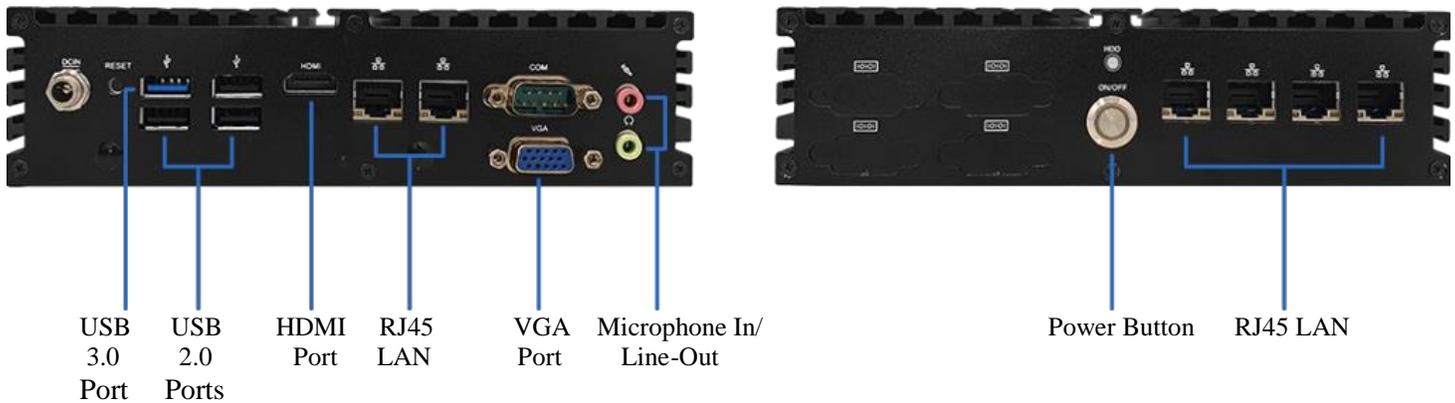


Figure 1. The CD8866 Features and Components

---

## Overview, Continued

### Thin Client Architecture Overview

A thin client is a remote computing device that connects a user's monitors, keyboard, mouse, speakers, and other peripherals to remote PC blades (computers) and to virtual desktops (VMs). As shown below, computing resources are typically located in remote data centers.

Using a remote connection protocol, thin clients enable users to work on a blade or VM as if it is a local PC. See the documentation for the remote protocol application that you use for additional information.

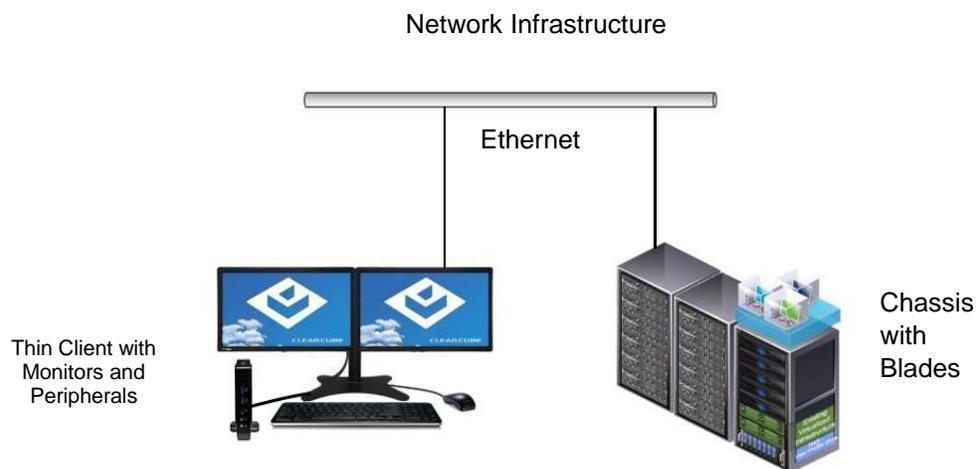


Figure 2. Overview of thin client architecture

## Thin Client Setup

---

### Safety and Precautions



- Do not install the thin client in areas where it can become wet or be exposed to water.
  - Only use the power cord shipped with the thin client.
  - Ensure there is four inches of space surrounding the thin client. Inadequate ventilation can damage the device.
- 

### Setting up a Thin Client

The steps below show how to set up a thin client.

Step	Action
1	Carefully unpack the thin client and components. Ensure that you have the following items: <ul style="list-style-type: none"><li>• Power cord and adapter (included)</li><li>• USB mouse</li><li>• USB keyboard</li><li>• HDMI monitor, VGA monitor, or both</li></ul>
2	Place the thin client as shown in Figure 1.
3	Connect a USB keyboard and mouse to the thin client.
4	Connect an Ethernet cable to the Ethernet port on the rear of the thin client and to the Ethernet port on the remote compute device or network device (such as a network switch).
5	Optionally, connect any peripherals to the thin client.

---

## Thin Client Setup, Continued

### Setting up a Thin Client (continued)

---

Step	Action
6	Connect the included power cord and AC adapter, and then plug the adapter into the rear of the thin client. Continue by plugging the power cord into an AC power outlet.
7	Power on the thin client by pressing the <b>power button</b> on the front of the thin client.

You can now use remote connection software to connect to a remote computing device.

**Next steps:** Perform the initial configuration of Cloud Desktop OS (First-Time Wizard) and, optionally, configure Wi-Fi connections.

---

### CD8866 Power Controls

The list below describes power functions available from the power cable and operating system.

---

- **Power cable with switch**

The power cable provides 12V power to the CD8866, and the switch integrated into the cable turns 12V power on and off.

- **Cloud Desktop OS**

- **Shutdown:** From Cloud Desktop OS, click **Start > Shutdown**.

- **Reboot:** From Cloud Desktop OS, click **Start > Reboot** to shut down and restart the operating system.

---

## Cloud Desktop OS (First-Time Wizard)

### About Cloud Desktop OS

Cloud Desktop OS is the operating system included with the ClearCube CD8866 thin client. See the Cloud Desktop Quick Start Guide included in your shipment for details about setting up and configuring Cloud Desktop OS. The quick start guide is also available from the ClearCube Support site ([www.clearcube.com/support/](http://www.clearcube.com/support/)). From the Software drop-down menu, click **Cloud Desktop OS**.

### BIOS Hotkey

To access the BIOS, press the **ESC** key when prompted as the ClearCube splash screen appears.

---

### User Accounts

Depending on configuration, thin clients include a Windows operating system or ClearCube Cloud Desktop OS.

#### Windows:

The thin client boots to the Administrator user account. The default Administrator password is **admin**. The default user password is **user**.

**NOTE:** Change administrator and user passwords immediately after logging in.

#### Cloud Desktop OS:

The CD8866 thin client boots to the user account and displays the Configuration Wizard the first time you power on the thin client. The default password is **admin** (case-sensitive).

**NOTE:** Change administrator password immediately after logging in. You can specify a new password using the Configuration Wizard (First-Time Wizard).

### The First-Time Wizard

Cloud Desktop OS displays the First-Time Wizard the first time you power on a client or after a factory reset. This wizard lets administrators create connections quickly by specifying a minimum number of Connection attributes. After creating a Connection, administrators can edit and create additional Connections using the OS's Configuration application.

The section below shows each step in the **First-Time Wizard**.

### First Connection

This section assumes you were powering on a client for the first time. The table below shows how to create a simple Connection and specify the administrator password.

Step	Action
1	Power on the thin client.  <b>Result:</b> The thin client displays the BIOS splash screen then boots to the desktop. The First-Time Wizard starts and displays the <b>Step 1 - Location and keyboard</b> screen.
2	From the drop-down menus, select values for the <b>Time zone, Country, System locale, and Keyboard layout</b> fields.
3	Click <b>Next</b> .  <b>Result:</b> The First-Time Wizard displays the <b>Step 2 - Create a connection</b> screen.
4	Click <b>Mode</b> to display a list of connection modes. Select the mode or protocol for the connection you are creating.
5	In the <b>Target</b> field, type the host name, URL, or IP address of the connection host or connection broker for the thin client.
6	Optionally, specify a group name in the <b>Resource</b> field if the host target is part of a resource group.
7	Optionally, select the <b>Automatic start</b> option to start the connection when the thin client is powered on.
8	Click <b>Next</b> .  <b>Result:</b> The First-Time Wizard displays the <b>Step 3 - Set administrator password</b> screen.
9	Specify an administrator password. This is the password that administrators use to access the OS's Configuration application.
10	Click <b>Finish</b> .  <b>Result:</b> The First-Time Wizard displays a success message and places a connection shortcut on the desktop. Click the <b>Close</b> button in the upper-right portion of the screen to close the First-Time Wizard. (Desktop Connection icons are enabled by default. You can change this setting from the Configuration application.)

**Next step:** The Connection is placed on the desktop and is available from the Start menu (see [Figure 3](#)). See the section below for information about starting a Connection. For more information about configuration options, see *Cloud Desktop OS Quick Start Guide*.

## Starting a Connection

Users can start Connections from the Start menu or from a desktop icon (if desktop icons are enabled in the Configuration application). The picture below shows a Connection desktop shortcut and a Connection listed in the Session menu.

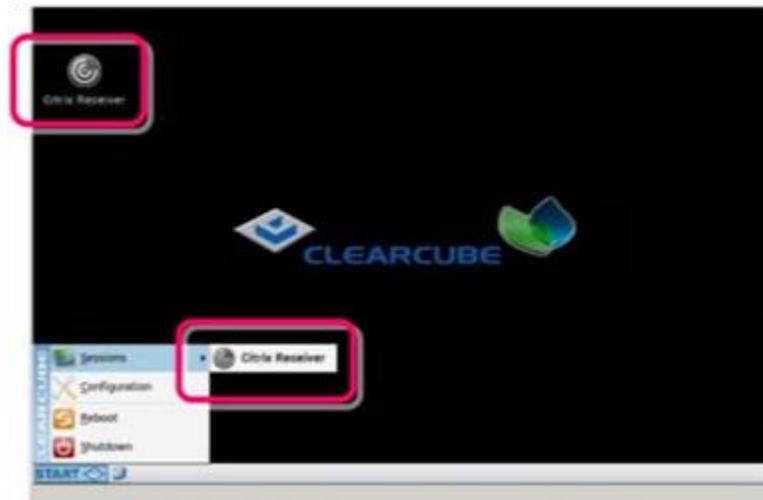


Figure 3. Connection (Sessions) shortcuts

The list below shows how to start a connection.

- Click **Start > Sessions**, and then select a **Connection**. (Alternatively, you can right-click an empty space on the desktop to display the Sessions menu.)

—OR—

- Double-click the Connection desktop icon.

Administrators can permit or prohibit Connection icons from appearing on the desktop. Click **Start > Configuration** and enter the administrator password. From the menu's **Management** area, click **Connections > edit**. Select an option from the **Icon on desktop** field.

## Resources and Support

---

### Additional Information

*CD8866 User Guide* shows how to configure, operate, and troubleshoot the CD8866 Thin Client.

*Cloud Desktop OS Quick Start Guide* describes how to configure, use, and deploy the Cloud Desktop operating system. All product documentation is available from the ClearCube Support site (see address below).

---

### Contacting Support

**Website:** [www.clearcube.com/support](http://www.clearcube.com/support)

**Email:** [support@clearcube.com](mailto:support@clearcube.com)

**Phone:** (512) 652-3400

**Toll-free:** (866) 652-3400

---

### WEEE Disposal Guidelines

In the European Union, this electronic product falls under the European Directive (2002/96/EC) WEEE. When it reaches the end of its useful life or is no longer wanted, dispose of it at an approved, designated recycling or treatment facility. Check with your local authorities for proper disposal instructions. For assistance, contact ClearCube at [recycle@clearcube.com](mailto:recycle@clearcube.com).

